
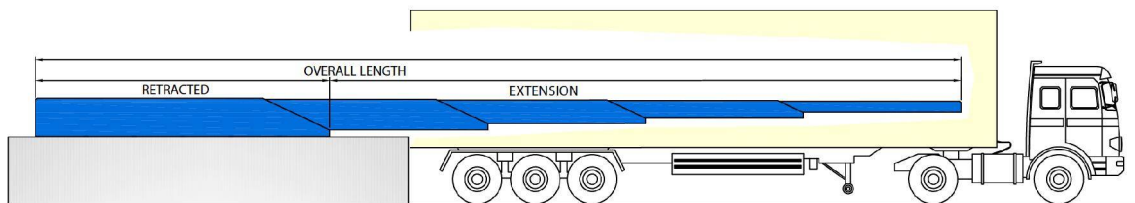


# BESTREACH MAXXREACH TELESCOPIC BELT CONVEYORS

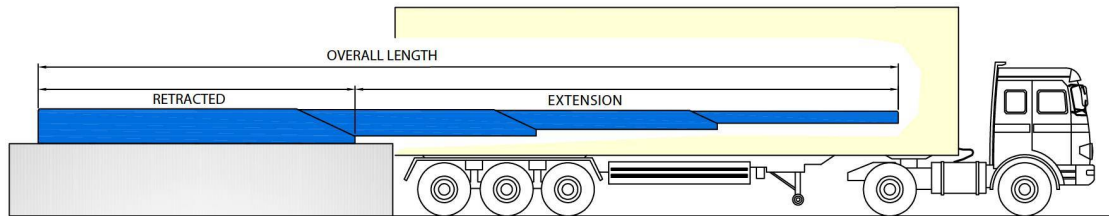

CONVEYORS with	BESTREACH						MAXXREACH		
	3 sections			4 sections			3 sections		
	BR3120s	BR3135	BR3150	BR4120	BR4150	BR4170	MR3170	MR3185	MR3198
<b>Retracted</b>	6m	6.5m	8m	5.5m	6.5m	7.5m	8m	8.8m	9.2m
<b>Extension (Reach)</b>	12m	13.5m	15m	12m	15m	17m	17m	18.5m	19.8m
<b>Overall Length</b>	18m	20m	23m	17.5m	21.5m	24.5m	25m	27.3m	29m

## STANDARD EQUIPMENT

- Heavy Duty Construction, section thickness main case 10mm
- Standard equipment: Siemens STEP 7 PLC and LED headlight in front
- Loading capacity: 50 kg/metre, according to application
- Standard belt widths: 600 or 800mm (others on request)
- Height top of belt according to application



## PERFORMANCE & ERGONOMICS

---

Man-Rider 650 x 1800 mm

Hydraulic Tilt from -1 to 3°





















C O N V E Y O R S

A DURAVANT COMPANY



  
**Processosigma**

Distributor  
for Portugal & Poland

**Processosigma, Unipessoal Lda**

FMH Conveyors Portugal & Poland

Tel Portugal: +351 933 749 707

Tel Poland: +48 667 087 039

Email: [info@processosigma.com](mailto:info@processosigma.com)

**[www.processosigma.pt](http://www.processosigma.pt)**

**WE HAVE SPECIFIC SOLUTIONS FOR YOUR APPLICATION**