





ProcessSigma



SOLUTIONS AND EQUIPMENT FOR LOOSE LOADING AND UNLOADING

BESTREACH MAXXREACH TELESCOPIC BELT CONVEYORS

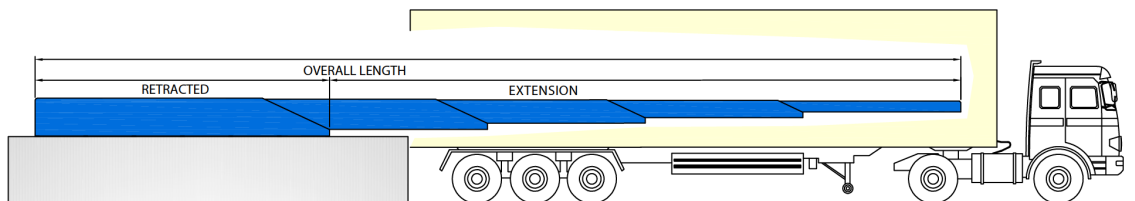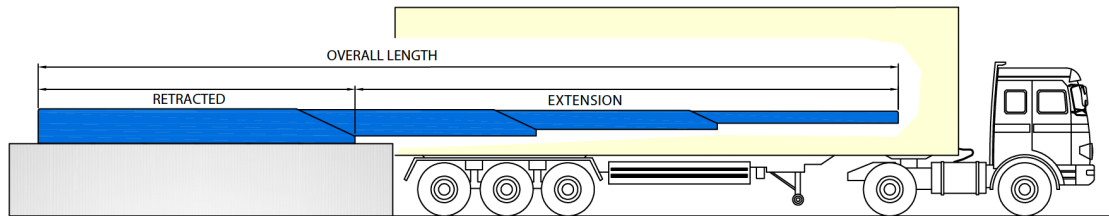

CONVEYORS with	BESTREACH						MAXXREACH		
	3 sections			4 sections			3 sections		
	BR3120s	BR3135	BR3150	BR4120	BR4150	BR4170	MR3170	MR3185	MR3198
Retracted	6m	6.5m	8m	5.5m	6.5m	7.5m	8m	8.8m	9.2m
Extension (Reach)	12m	13.5m	15m	12m	15m	17m	17m	18.5m	19.8m
Overall Length	18m	20m	23m	17.5m	21.5m	24.5m	25m	27.3m	29m

STANDARD EQUIPMENT

- Heavy Duty Construction, section thickness main case 10mm
- Standard equipment: Siemens STEP 7 PLC and LED headlight in front
- Loading capacity: 50 kg/metre, according to application
- Standard belt widths: 600 or 800mm (others on request)
- Height top of belt according to application



PERFORMANCE & ERGONOMICS

Man-Rider 650 x 1800 mm

Hydraulic Tilt from -1 to 3°

















POWERFLEX

MOTORIZED FLEXIBLE CONVEYORS



Type **PF15** **POWERFLEX** Rollers Ø 40 mm

- Very robust Construction
- Drive capacity: 150 kg/metre
- Castors Ø 150x50 mm
- Standard roller pitch 127 mm
Available options: pitch 76 and 102 mm
- Bright zinc plated rollers Ø 40 mm
- Adjustable height: 800 to 1100 mm
- Available in any length
- Speed regulation: from 5 to 60 cm/sec
- Electrical connection: single phase 230V

Type **PF19** **POWERFLEX** Rollers Ø 50 mm

- Very robust Construction
- Drive capacity: 150 kg/metre
- Castors Ø 200x50 mm
- Standard roller pitch 127 mm
Available options: pitch 76 and 102 mm
- Bright zinc plated rollers Ø 50 mm
- Adjustable height: 725 to 950 mm
- Available in any length
- Speed regulation: from 5 to 60 cm/sec
- Electrical connection: single phase 230V

Type **PF15**
POWERFLEX
 Rollers Ø 40 mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	14.6 m - 4.9 m 18.3 m - 6.1 m 19.6 m - 6.6 m 30.5 m - 10.2 m Any length available
Width 750 mm	14.6 m - 4.9 m 18.3 m - 6.1 m 19.6 m - 6.6 m 30.5 m - 10.2 m Any length available
Width 900 mm	14.6 m - 4.9 m 18.3 m - 6.1 m 19.6 m - 6.6 m 30.5 m - 10.2 m Any length available

Type **PF19**
POWERFLEX
 Rollers Ø 50 mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	14.6 m - 6.2 m 18.3 m - 7.8 m 19.6 m - 8.3 m 30.5 m - 13 m Any length available
Width 750 mm	14.6 m - 6.2 m 18.3 m - 7.8 m 19.6 m - 8.3 m 30.5 m - 13 m Any length available
Width 900 mm	14.6 m - 6.2 m 18.3 m - 7.8 m 19.6 m - 8.3 m 30.5 m - 13 m Any length available









BESTFLEX

GRAVITY FLEXIBLE CONVEYORS



Type **BFR**
BESTFLEX
with Rollers

- Very robust Construction
- Load capacity: 220 kg/metre
- Castors Ø 127x38 mm
- Standard roller pitch 127 mm
- Available options: pitch 76 and 102 mm
- Bright zinc plated rollers Ø 35 mm
- Adjustable height: 720 to 1000 mm



Type **BF/200**
BESTFLEX
with Skatewheels

- Very robust Construction
- Load capacity: 300 kg/metre
- Castors Ø 127x38 mm
- Standard roller pitch 127 mm
- Available options: pitch 76 and 102 mm
- Zinc plated or plastic skatewheels Ø 48mm
- Adjustable height: 720 to 1000 mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	4.9 m - 1.7 m
	6.1 m - 2.1 m
	7.4 m - 2.6 m
	9.8 m - 3.4 m
	Any length available
Width 750 mm	4.9 m - 1.7 m
	6.1 m - 2.1 m
	7.4 m - 2.6 m
	9.8 m - 3.4 m
	Any length available
Width 900 mm	4.9 m - 1.7 m
	6.1 m - 2.1 m
	7.4 m - 2.6 m
	9.8 m - 3.4 m
	Any length available

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	4.9 m - 1.3 m
	6.1 m - 1.6 m
	7.4 m - 2 m
	9.8 m - 2.6 m
	Any length available
Width 750 mm	4.9 m - 1.3 m
	6.1 m - 1.6 m
	7.4 m - 2 m
	9.8 m - 2.6 m
	Any length available
Width 900 mm	4.9 m - 1.3 m
	6.1 m - 1.6 m
	7.4 m - 2 m
	9.8 m - 2.6 m
	Any length available

BESTCONNECT

MOBILE MOTORIZED CONVEYORS



STANDARD EQUIPMENT


- Mobile modular conveyors
- Electrical connection: single phase 230V
- Speed regulation: from 5 to 60 cm/sec
- Standard widths: 600, 750 & 900 mm
- Bright zinc plated rollers Ø 50 mm
- Standard roller pitch: 75 & 100 mm
- Standard bidirectional drive
- Reconfigurable layout (plug & play)






BESTREACH MVL MOBILE VEHICLE LOADER

- Contact us for more information

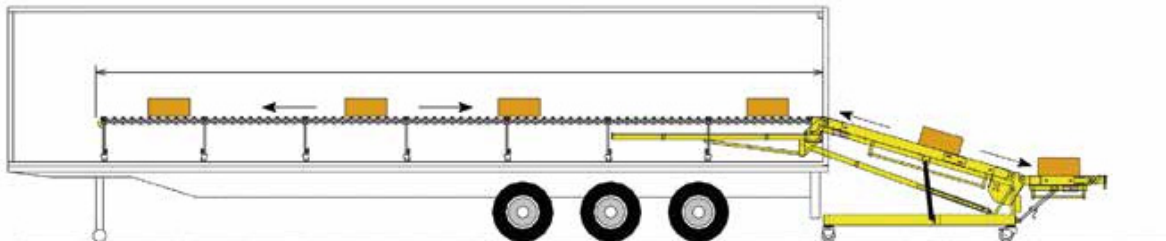

BESTREACH SVL SMALL VEHICLE LOADER

- Contact us for more information

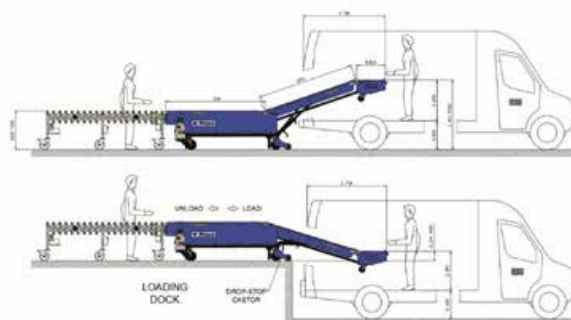



C O N V E Y O R S

A DURAVANT COMPANY




Processosigma

Distributor
for Portugal & Poland

Processosigma, Unipessoal Lda
FMH Conveyors Portugal & Poland
Tel Portugal: +351 933 749 707
Tel Poland: +48 667 087 039
Email: info@processosigma.com
www.processosigma.eu

WE HAVE SPECIFIC SOLUTIONS FOR YOUR APPLICATION